


DT50

Data Logger



Intelligent Data Logging Products

- General Purpose Low Cost, Low Power Data Logger
- 5-10 Sensor Channels, 8 Digital Channels
- Unique Universal Channels
- Up to 1,390,000 Data Points
- Stand Alone & Real Time Data Acquisition
- Remote Monitoring & Control
- Removable Screw Terminals

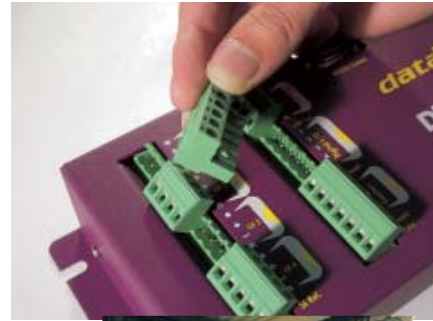

The dataTaker DT50 General Purpose Low Cost Unit

The dataTaker DT50 is a general purpose low cost data logger. The DT50 features 5 to 10 analog channels depending on sensor type, five digital input channels, 3 high speed counters and sampling speed of 25 - 70 samples per second.




Data can be conveniently and securely stored in battery backed RAM and removable PC cards; the latter providing storage for up to 1,390,000 data points. Alarms may be set for all channels. The DT50's rugged steel construction makes the unit suitable for harsh environments.

Specifications

Applications include:

- | | | |
|-----------------------|----------------------|--------------------------|
| • Fault Finding | • Automotive Testing | • Temperature Profiling |
| • Weather Stations | • Flood Warnings | • Research & Development |
| • Process Monitoring | • Machine Down Time | • Load Cells |
| • Building Monitoring | • Strain Guages | |

FREE
Software &
Technical
Support

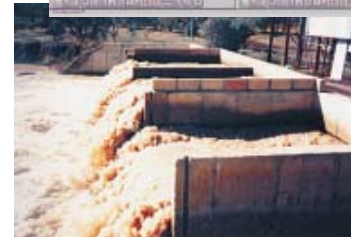

dataTaker software and Resource CD

The dataTaker Resource CD is provided FREE with every new logger. It contains software to enable easy setup, fast download, real time viewing of data and direct export to excel spreadsheets. The Resource CD also contains helpful training videos, manuals, application and technical notes and other valuable utilities.

DeLogger™ 4 Pro is the enhanced graphical package including additional automation, reporting, database and remote dataTaker management features.

For your nearest local DataTaker distributor visit www.datataker.com.

Australasia

Datataker Pty Ltd
7 Seismic Court
Rowville Melbourne
Victoria 3178
Tel: +61 3 9764 8600
Fax: +61 3 9764 8997
Email: sales@datataker.com.au

Europe

Grant Instruments (Cambridge) Ltd
Shepreth
Cambridgeshire
SG8 6GB
Tel: +44 (0) 1763 264780
Fax: +44 (0) 1763 262410
Email: sales@datataker.co.uk

Americas

Computer Aided Solutions
8588 Mayfield Rd, Suite One
Chesterland, OH 44026
Tel: +1 800 9 LOGGER
Tel: +1 440 729 2570
Fax: +1 413 375 6137
Email: sales@computeraidedsolutions.com

www.datataker.com



Analog Channels

Channel Number

Number of input channels depends on sensor wiring configuration. Sensor configurations may be mixed:
 Two wire: 5
 Two wire with one shared terminal: 10
 Three wire: 5
 Four wire: 5
 4-20mA current loop: 5 with shared common + with 10 external shunts

Fundamental Input Ranges

The DT50 hardware measures voltage, current, resistance and frequency. From these, all other measurements are derived.

Full Scale	Resolution	Full Scale	Resolution
±25.00 mVdc	2.00 µV	50 Ω	.25 mΩ
±250.0 mVdc	20.00 µV	500 Ω	2.50 mΩ
±2.50 Vdc	200.00 µV	5,000 Ω	25.00 mΩ
±0.25 mA	0.20 µA	100 Hz	0.01 %
±2.50 mA	1.00 µA	10 Hz	0.01 %
±25.00 mA	10.00 µA		

Accuracy

Measurement at	25°C	-45°C to 60°C
DC Voltage	0.15%	0.25%
DC Current	0.25%	0.35%
DC Resistance	0.20%	0.30%

Sensor Excitation

Each channel: 4.5V (10k source), 250µA or 2.5mA switched on when channels is selected
 DC Voltage: 5V at 100mA (max.) switched

Multiplexer (Channel Selector)

Type: solid-state ±5V input ratings
 Input impedance: 1M or >100M, programmable
 Common mode range: ±3.5V

Internal Channels

Temperature (thermocouple reference junction): 1
 Reference voltage channels: 1
 Internal battery voltage: 1

Sampling

Sampling for accuracy and noise rejection by integrating over 50/60Hz line period.
 Maximum sample speed: 25Hz
 Effective resolution: 15 bits
 Linearity: 0.01%
 Common mode rejection 25mV range: >90dB
 Line (50/60Hz) series mode rejection: >35dB

Sensor Support

Supports a wide range of sensors types including, but not limited to the following:

Thermocouples

Types: B, C, D, E, G, J, K, N, R, S, T
 Reference junction compensation accuracy:

Case temperature	2.5°C	-20 to +60°C
Accuracy	±1.0°C	±1.5°C

RTDs

Types: Pt, Ni, Cu
 Resistance range: 10Ω to 20k
 Measurement accuracy: 4 wire: 0.15% of resistance value
 3 wire: 0.25% of resistance value

Thermistors

Types: YSI 400xx Series
 Resistance range: <7kΩ,
 <20kΩ with parallel resistor

Monolithic Temperature Sensors

Types supported: LM335, LM34, LM35, AD590

Bridge Sensors

Configurations: 4-wire and 6-wire
 Excitation: voltage or current
 Bridge completion: external or internal half bridge

4-20mA Current Loops

Shunt value: 100Ω to a shared common
 Accuracy: 0.25% at 25°C

Sensors - Comments

A wide range of sensor scaling and linearising facilities are provided including polynomials, expressions and functions.

Digital Channels

Number of Channels

Bi-directional channels: 5
 Dedicated counter channels: 3

Digital Input

Number: 5, shared with bi-directional channels
 Input Type: logic level (protected with pull-up)

Counter Channels

Number: 5 low speed (10Hz) shared with bi-directional channels
 3 high speed (1kHz, sleep mode) with switchable internal clocking options
 Size: 16 bit (65535 counts)

Digital Output

Number: 5
 Output type: open-collector npn transistor
 Rating: +30V, 100mA

Calculation Channels

Any expression involving variables and functions including: sin(), cos(), tan(), asin(), acos(), atan(), abs(), sqrt(), average, maximum, minimum, time of max., time of min., variance, integral, histogram

Scheduling of Data Acquisition

Number of schedules: 4 acquisition schedules
 Scan triggers: time base or digital event
 Conditional scanning: while digital input high
 Time based scheduling: from seconds to months in increments of 1 second, 1 minute, 1 hour and 1 day
 Maximum scheduled rate: 1 second or as fast as possible, typically 25 samples per second
 Dynamic scan time base change: yes
 Maximum number of channel entries: 110

Alarms

Condition: high, low, within range and outside range
 Delay: optional time period for alarm response
 Actions: set digital outputs, execute any dataTaker commands. Alarms can be combined in a logical fashion.

Data Storage

Internal

Type: battery backed SRAM
 Capacity: 166,500 data points

PC Card

Types: SRAM to 4MBytes, Type 1
 Card voltage: 5V types
 Capacity: up to 1,390,000 data points
 Data format: proprietary

Download Data Format

Format: ASCII floating point, fixed point or exponential formats
 Compatibility: spreadsheets, word processors, graphing packages, statistical programs and SCADA software

Serial Interface (RS232)

The DT50 is programmed and data extracted via the RS232 serial interface
 Speed: 300 to 9600 baud (9600 default)
 Handshake: XON and XOFF
 Wake from sleep: yes
 Isolation: 500V
 Compatibility: computers, modems, satellite-modems, radio-modems and printers

System

Processor type: Z180, 18 MHz
 Program storage: FLASH
 Data storage: SRAM, battery backed
 Indicator LED: sampling

Real Time Clock

For time stamping of data, scheduling and timers
 Normal resolution: 1 second
 Accuracy: 2 seconds per day (25°C)

Power Supply

Voltage range: 11 to 24Vdc or 9 to 18Vac
 External battery input: 6V lead acid

Power Consumption

In normal mode: 1W (2W with ext. battery charging)
 Sleeping: 2mW (350µA from 6V battery)
 Typical low power operation: 20mW

Internal Backup Battery

For real time clock and internal data storage backup
 Type: 3V 1/2AA Lithium

Physical and Environment

Construction: Powder coated fabricated steel
 Dimensions: 260 x 110 x 55mm (height 104mm with PC Card)
 Weight: 1.5kg (2.5kg shipping)
 Environment temperature range: -45°C to 70°C
 Humidity: 85%, non-condensing

Accessories Included

Comms cable: for PC
 Resource CD which includes standard software
 Manuals: "Getting Started with dataTaker"
 "User's Manual"
 Line adaptor: 110/240Vac, 500mA

Optional Accessories

Battery (Recommended)

A battery can be connected for stand alone data logging. The battery can be re-charged by the DT50 when main supply is restored/applied.
 Chemistry: lead acid gel cell
 Voltage: 6V
 Maximum charge current: 200mA
 Temperature compensation charging: -10°C to +70°C

External Battery (GC-4)

Capacity: 4AHr for mounting external to the DT50
 Normal: approx. 24 hours
 Low power: approx. 12 months

Internal Battery (BATOPTION)

0.5AHr (Lead Acid) - factory fitted
 Normal: approx. 3 hours
 Low power: approx. 1 months

Portable Carrying Case (PE500)


Capacity: 1 DT50 unit + battery
 Environmental protection: IP66
SRAM PC Card (MC1024P, MC4096P)
 Capacity: 1MByte, approximately 340,000 data points
 4MByte, approximately 1,390,000 data points

DeLogger™ 4 Pro

Graphical programming and supervision software. Supports a large network of DT50, DT500 and DT800 range units connected via modem. Features include comprehensive plotting, reporting, mimics, database, web publishing and other powerful capabilities.

dataTaker®

Your local distributor

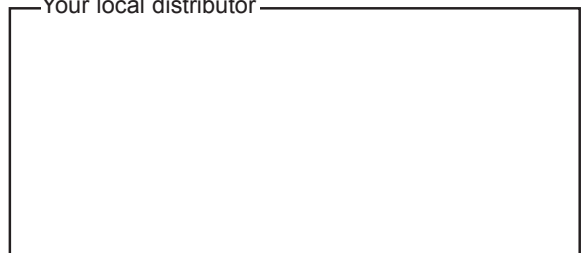

Warranty: Equipment manufactured by Datataker is warranted against faulty materials or workmanship for three years. For repairs carried out under warranty, no charge is made for labour, materials or return carriage. All non Datataker manufactured products are covered by original manufacturer's warranty.

Quality Statement: Datataker operates a Quality Management System complying with ISO9001:2000. It is Datataker's policy to supply customers with products which are fit for their intended purpose, safe in use, perform reliably to published specification and are backed by a fast and efficient customer support service.

Trademarks: dataTaker, DeLogger, DeTransfer, DePlot are either registered trademarks or trademarks of Datataker Pty Ltd.

Manufactured and designed in Australia.

www.datataker.com